



POLYCHEM[®]
CORPORATION

SV-5000

Automatic Strapping Machine
Servo-Motor Technology
with Automatic Loading




The SV-5000 Automatic Strapping Machine. A state of the art machine, featuring servo-motor technology, auto strap loading, loop ejector, end of strap eject, and many other features.

The Best Choice...The Only Choice

SV-5000 Automatic Strapping Machine

Servo-Motor Technology with Automatic Loading

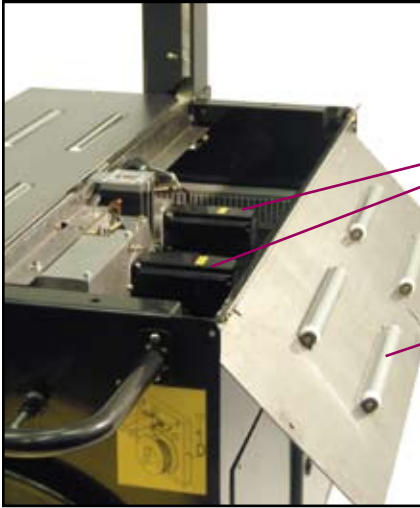

Servo-Motor Technology

Easy Access Fold Open Roller Tops



Push Button Auto Load



Movable Magnetic Pendant

Features:

- Capable up to 50 Straps/Minute
- PLC Controlled with Diagnostics
- Electronic Reel Brake
- Electronic Tensioning
- Movable Magnetic Pendant
- Loop Ejector
- Long Life Heater Blade
- Power Saving System, Motor Runs Only During Cycle
- Easy Access Strap Path (No Tools)
- Auto Refeed
- Choice of Arch Sizes & Strap Widths
- Clean Design with Few Parts

Specifications:

Minimum Package Size: 4" x 4"
 Maximum Package Size: Within Arch Size
 Maximum Tension: 150 lbs.
 Table Top Height: Standard: 30 Inches
 Optional: 27 Inches
 Electrical Supply: 110 VAC, 15A
 Core Sizes: 8 x 8 or 9 x 8
 Strap Sizes: 5mm, 6mm, 9mm (3/8)
 Polypropylene
 Stock Arch Sizes: See Chart

Stock Arch Sizes		Width		
		25"	33"	41"
Height	15"			
	23"			
	31"			

Polychem Plastic Strapping • Up to 50% MORE FOOTAGE PER COIL!!
 New Polychem long length coils

- Save time and money
- Lower cost per foot
- Fewer coil changes
- MAS50XLY Yellow 5mm x 32,000 feet
- MAS60XLY Yellow 6mm x 29,000 feet
- MAS90XLY Yellow 9mm x 18,000 feet

NOTE: All throughput estimations vary with actual arch size, package size, and conveyor speed.



6277 HEISLEY ROAD
 MENTOR, OHIO 44060
 (440) 357-1500
 FAX (440) 352-9553
 1-800-548-9557

WEST COAST DISTRIBUTION CENTER
 11920 ALTAMAR PLACE
 SANTA FE SPRINGS, CA 90670
 (562) 903-4576
 Fax (562) 903-4579
 1-800-899-0822